

# Diamond

## ACRYLIC FLOOR POLISH (25%)

- *High quality shine for improved appearance*
- *Thermoplastic polymer protects the floor*
- *Builds good slip-resistance - no health and safety concerns*

A high quality acrylic polymer-based metallised floor polish, which dries to a high level deep gloss (Drybright), with excellent slip resistance.

Diamond protects and prolongs the life of flooring materials. It is a super high solids polish that produces a low maintenance, durable finish.

Suitable for use on non-porous floors, including; vinyl, thermoplastic, linoleum, rubber, asphalt, sealed wood, marble and terrazzo.

Possible areas of use include hospital corridors and wards, schools, offices, shops, airports, village halls, etc.


### DIRECTIONS

**PREPARATION:** To obtain optimum results, it is important that thorough preparation of the floor is undertaken. The floor must be thoroughly cleaned to remove all dirt, grease and old polish films by using a quality polish remover such as Clover Chemicals' REMOVE or ZIP STRIP. The floor must be well rinsed with water and allowed to dry before applying DIAMOND.


**APPLICATION:** Apply a thin film of DIAMOND (undiluted) using a mop or polish applicator. Drying time is normally around 30 minutes. Apply a second coat and allow to dry. Coverage is dependent on the porosity of the floor covering. In general, 5 litres of DIAMOND will cover approximately 250 square metres of floor.




delivering solutions

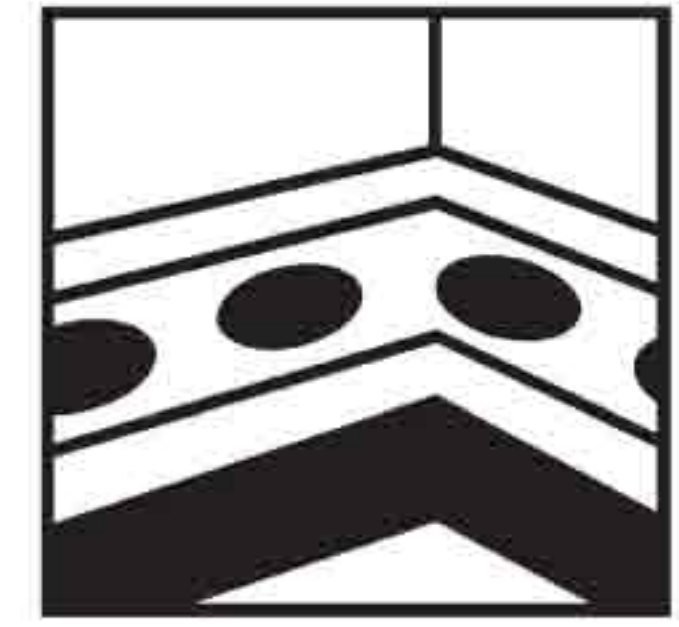


Linoleum

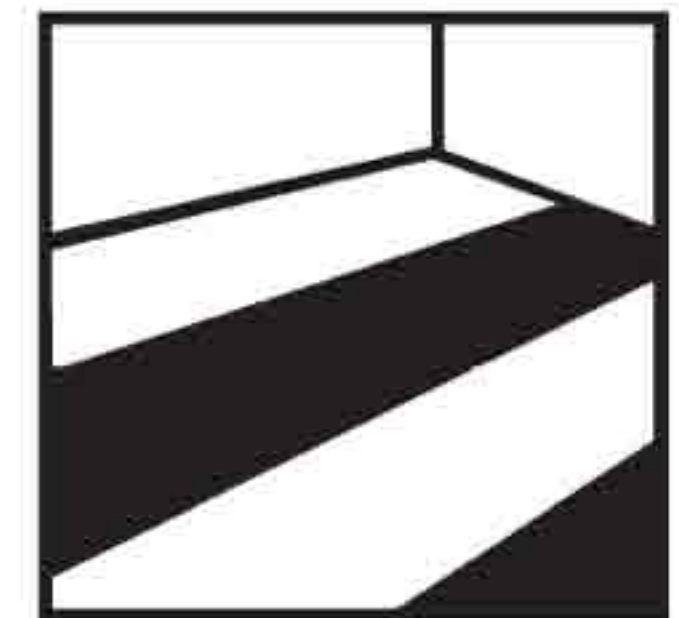

PVC/Vinyl

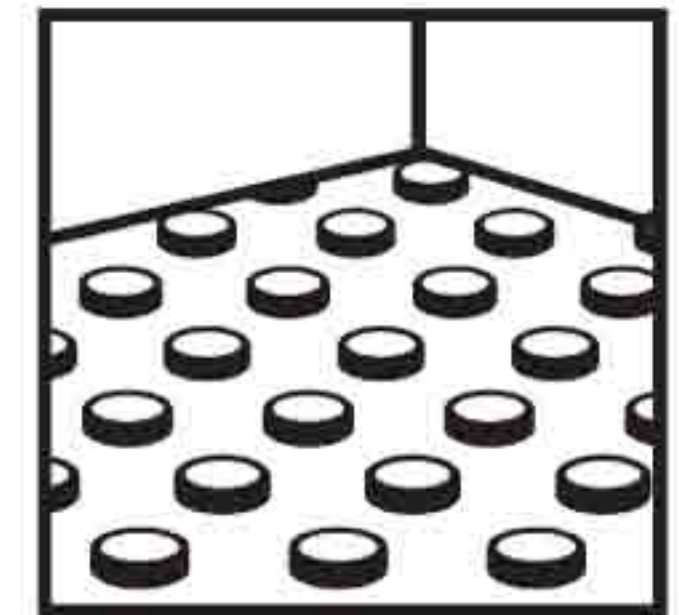


Rubber

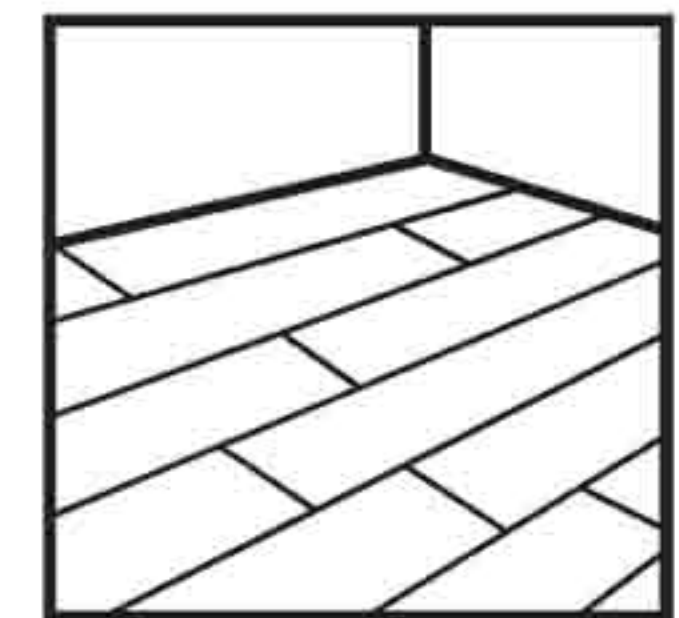

Laminate



Sealed wood

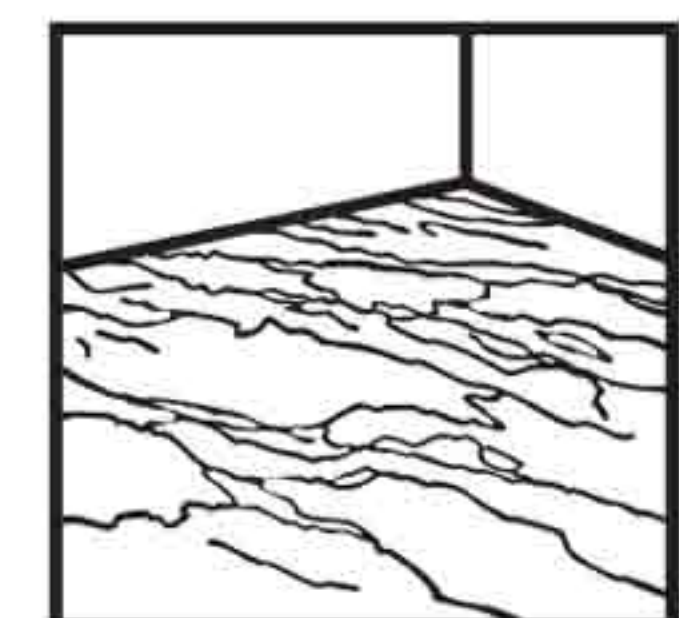

Marble



[www.thechemicalhut.com](http://www.thechemicalhut.com) [info@thechemicalhut.com](mailto:info@thechemicalhut.com)

LoCall: 0844 7700 613

Unit 9 Lonpark Industrial Estate,  
Chadwick Street, Stoke-on-Trent  
Staffordshire ST3 1PJ